

DESCRIPTION

- » Up to 14 sashes outside and inside opening
- » Possibility of either even or odd number of sashes
- » it allows to insert the bottom frame in the pavement



TECHNICAL DATA

» Maximum glazing thickness
45 mm

» Opening possibilities
Folding up to 14 sashes.

» Sections
Frame – 73 mm / Sash – 73 mm


» Profile thickness
Door 1,8 mm

» Polyamide strip length
Frame 20 mm / Sash 30 mm

» Maximum dimensions/sash
Width (L) = 1.200 mm
Height (H) = 3.000 mm

» Maximum weight/sash
120 Kg



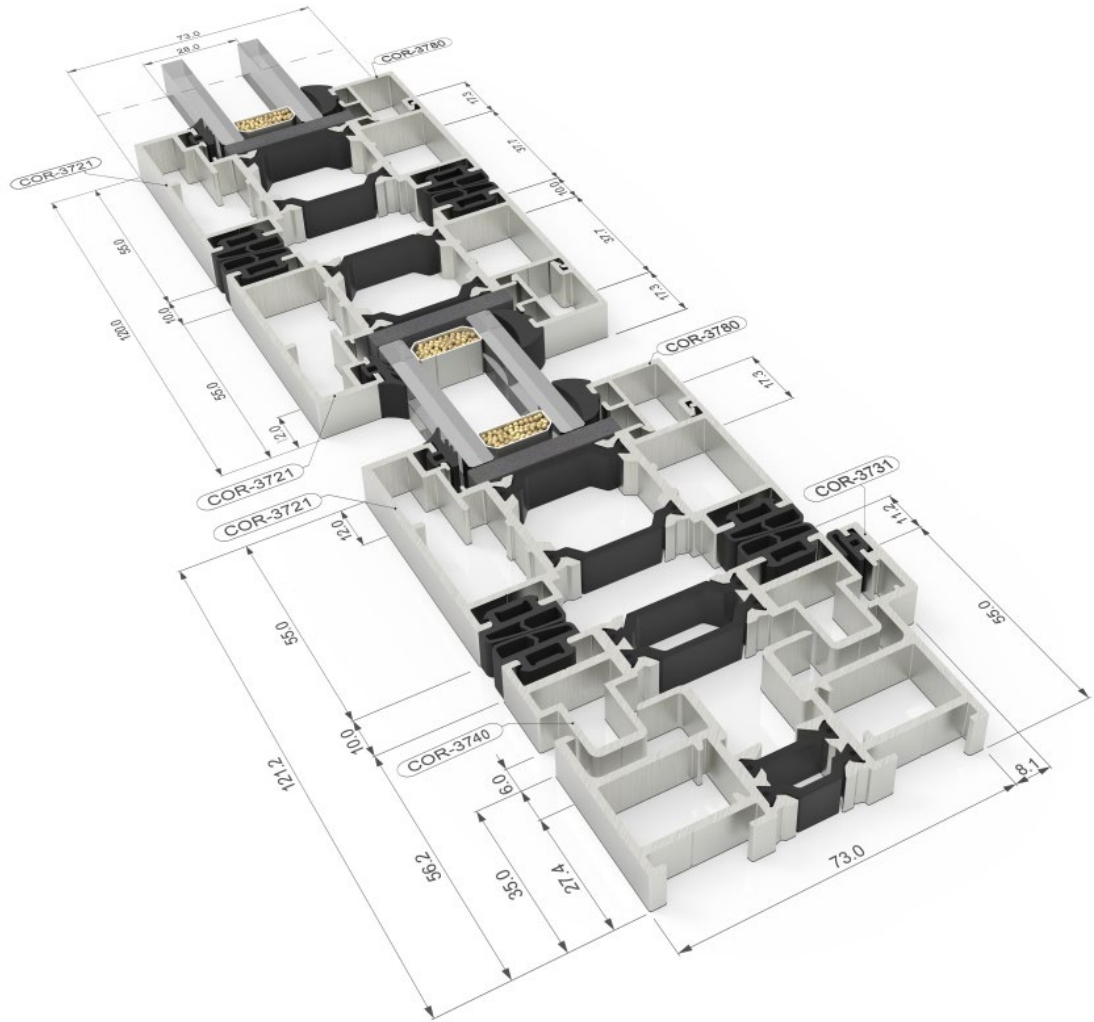

TEST CENTRE

» Transmittance
 U_w from 1,1 (W/m^2K)
 Please consult typology, dimensions and glazing

» Air permeability
 (EN 12207:2000) CLASE 4

» Water tightness
 (EN 12208:2000) CLASE 9A

» Wind resistance
 (EN 12210:2000) CLASE A3

Reference test 2.70 x 2.53 m. 3 sashes

» Security Test
 (PAS 24: 2012): Passed

Reference test 2701 x 2517 mm. 3 sashes.
 Set-up: 330

Please consult regarding maximum weight and dimensions
for other opening types

» Finishes

Possibility of bicolor systems

Color powder coating (RAL, mottled and rough)

Wood effect powder coating

Anti-bacterial powder coating

Anodized

