

DESCRIPTION

- » Lift and slide door system that exhibits the best thermal insulation
- » Uw from 0,9 Wm²K
- » Possibility of two options for central sash encounter, 110 mm standard section and minimalist solution of only 50mm
- » Possibility of large sash dimensions makes this system ideal for enclosing large spaces, at the same time that it provides maximum luminosity
- » It is a robust system in appearance, but light at the same time, providing an ultra smooth opening action and perfect sash sliding over a stainless steel rail



TECHNICAL DATA

» Maximum glazing thickness
 55 mm

» Opening possibilities
 Sliding of 2, 3, 4 & 6 sashes
 Possibility of 1 rail (1 sash + 1 fixed light)
 & 3 rails

» Sections
 Frame 160.6 mm - 3 rails 251 mm
 Sash 70 mm


» Profile thickness
 Door 2,0 mm

» Polyamide strip length
 Frame 35 mm / Sash 24 mm

» Maximum dimensions/sash
 Width (L) = 3.300 mm
 Height (H) = 3.300 mm

» Maximum weight/sash
 400 Kg



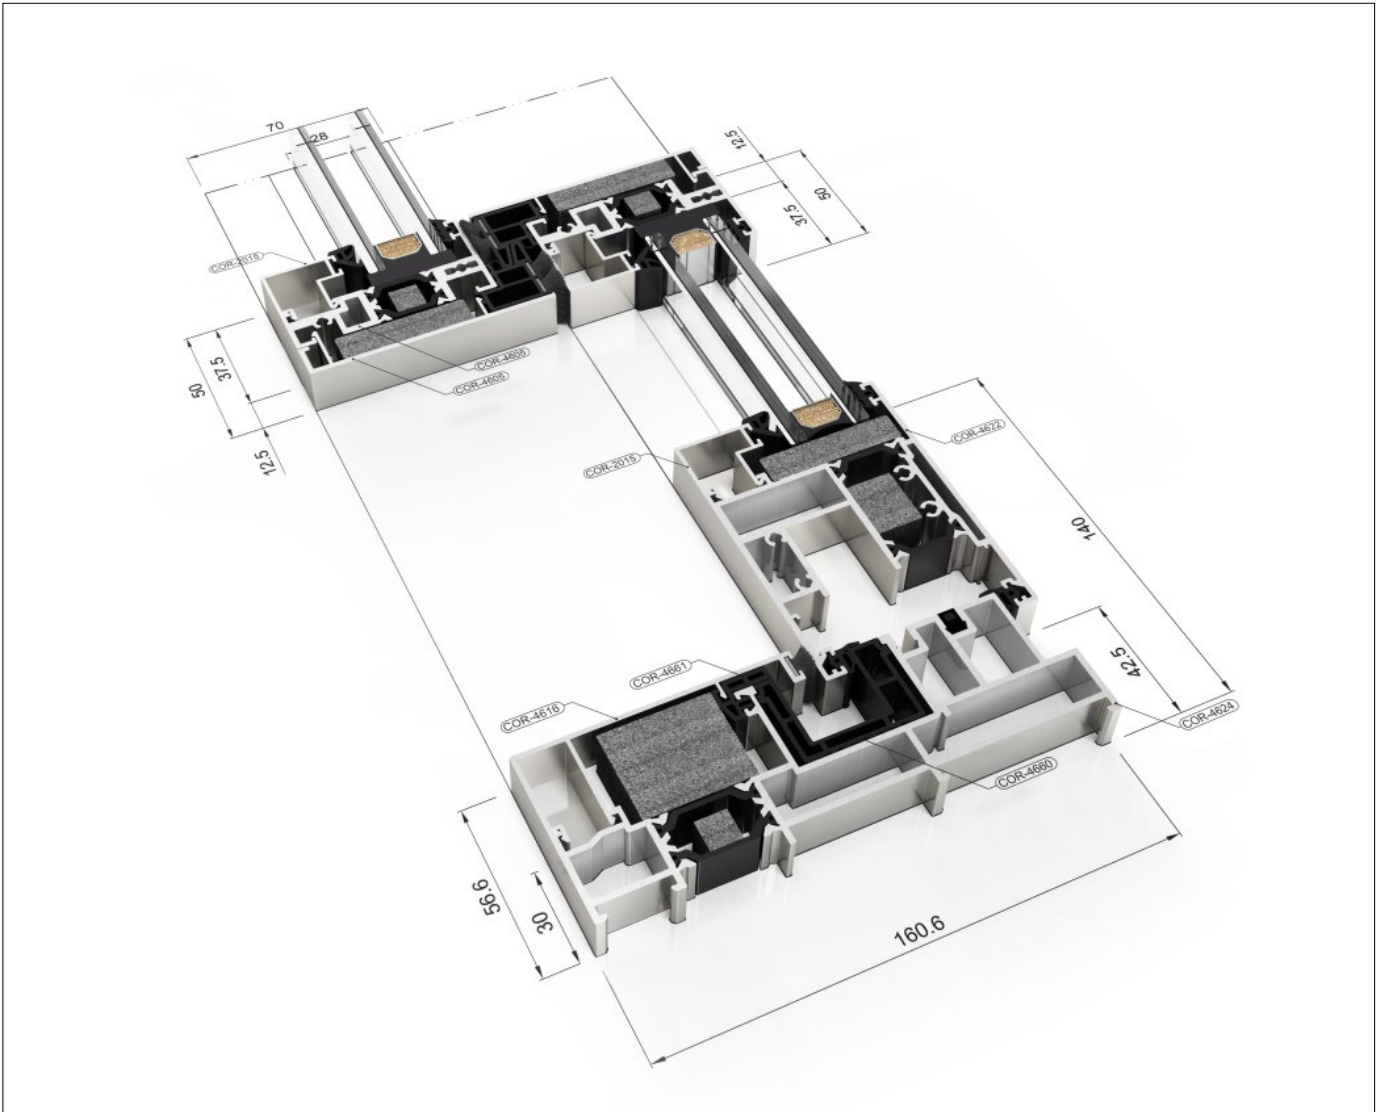

TEST CENTRE

» Transmittance

Uw from 0,9 (W/m²K)

Please consult typology, dimensions and glazing

» Maximum acoustic insulation

Rw=43 dB

» Air permeability

(EN 12207:2000) CLASS 4

» Water tightness

(EN 12208:2000) CLASS 9A

» Wind resistance

(EN 12210:2000) CLASS C5

Reference test 4,0 x 2,4 m. 2 sashes

Please consult regarding maximum weight and dimensions for other opening types

» Finishes

Possibility of bicolor systems

Color powder coating (RAL, mottled and rough)

Wood effect powder coating

Anti-bacterial powder coating

Anodized

