

## DESCRIPTION

- » A versatile system with thermal bridge
- » 45° frame encounters
- » 45° or 90° sash encounters
- » Curved or straight sashes
- » Possibility of pocket system



## TECHNICAL DATA

» Maximum glazing thickness  
26 mm

» Opening possibilities  
Sliding of 2, 3, 4 & 6 sashes  
Possibility 3 rails  
Possibility pocket system: 1 rail and 2 rails of 1, 2 or 4 sashes

» Sections  
Frame 60, 65, 67 & 80 mm - 3 rails 106 & 126 mm  
Sash 33 & 37 mm


» Profile thickness  
Window 1,5 mm

» Polyamide strip length  
From 14,6 to 20 mm

» Maximum dimensions/sash  
Width (L) = 2.200 mm  
Height (H) = 2.600 mm

» Maximum weight/sash  
45° sash encounter 100 Kg  
90° sash encounter 200 Kg



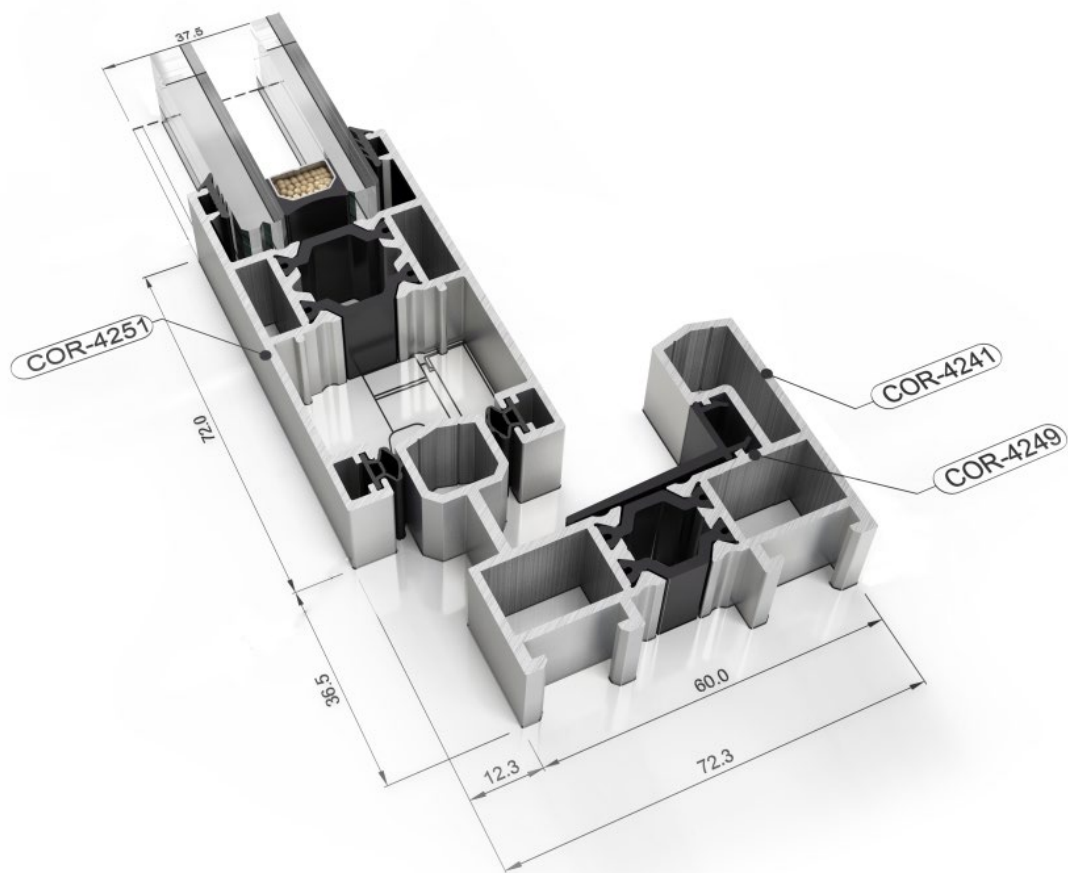

## TEST CENTRE

### » Transmittance

Uw from 1,1 (W/m<sup>2</sup>K)

Please consult typology, dimensions and glazing

### » Maximum acoustic insulation

Rw=40 dB

### » Air permeability

(EN 12207:2000) CLASS 3

### » Water tightness

(EN 12208:2000): CLASS 7A

### » Wind resistance

(EN 12210:2000) CLASS C5

Reference test 1,20 x 1,20 m. 2 sashes

Please consult regarding maximum weight and dimensions for other opening types

» Finishes

Possibility of bicolor systems

Color powder coating (RAL, mottled and rough)

Wood effect powder coating

Anti-bacterial powder coating

Anodized

