

## DESCRIPTION

- » A 70 mm frame depth Euro-Groove hidden sash window system
- » Seen surface of only 66 mm from the outside
- » Maximum glazing surface
- » Extraordinary increase in luminosity
- » Possibility of incorporating hardware with concealed hinges & the security system Evo Security



## TECHNICAL DATA

- » Maximum glazing thickness  
40 mm

- » Opening possibilities  
Open inwards:  
Side hung, turn & tilt of 1 or 2 sashes, tilt & parallel, bottom hung

- » Sections  
Frame – 70 mm / Sash – 70 mm

- » Profile thickness  
Window 1,9 mm


- » Polyamide strip length  
35 mm

- » Maximum dimensions/sash  
Width (L) = 1.300 mm  
Height (H) = 2.400 mm  
Standard solution

- Width (L) = 1.200 mm  
Height (H) = 3.500 mm  
Cortizo Hinges HD Side Hung

- » Maximum weight/sash  
160 Kg



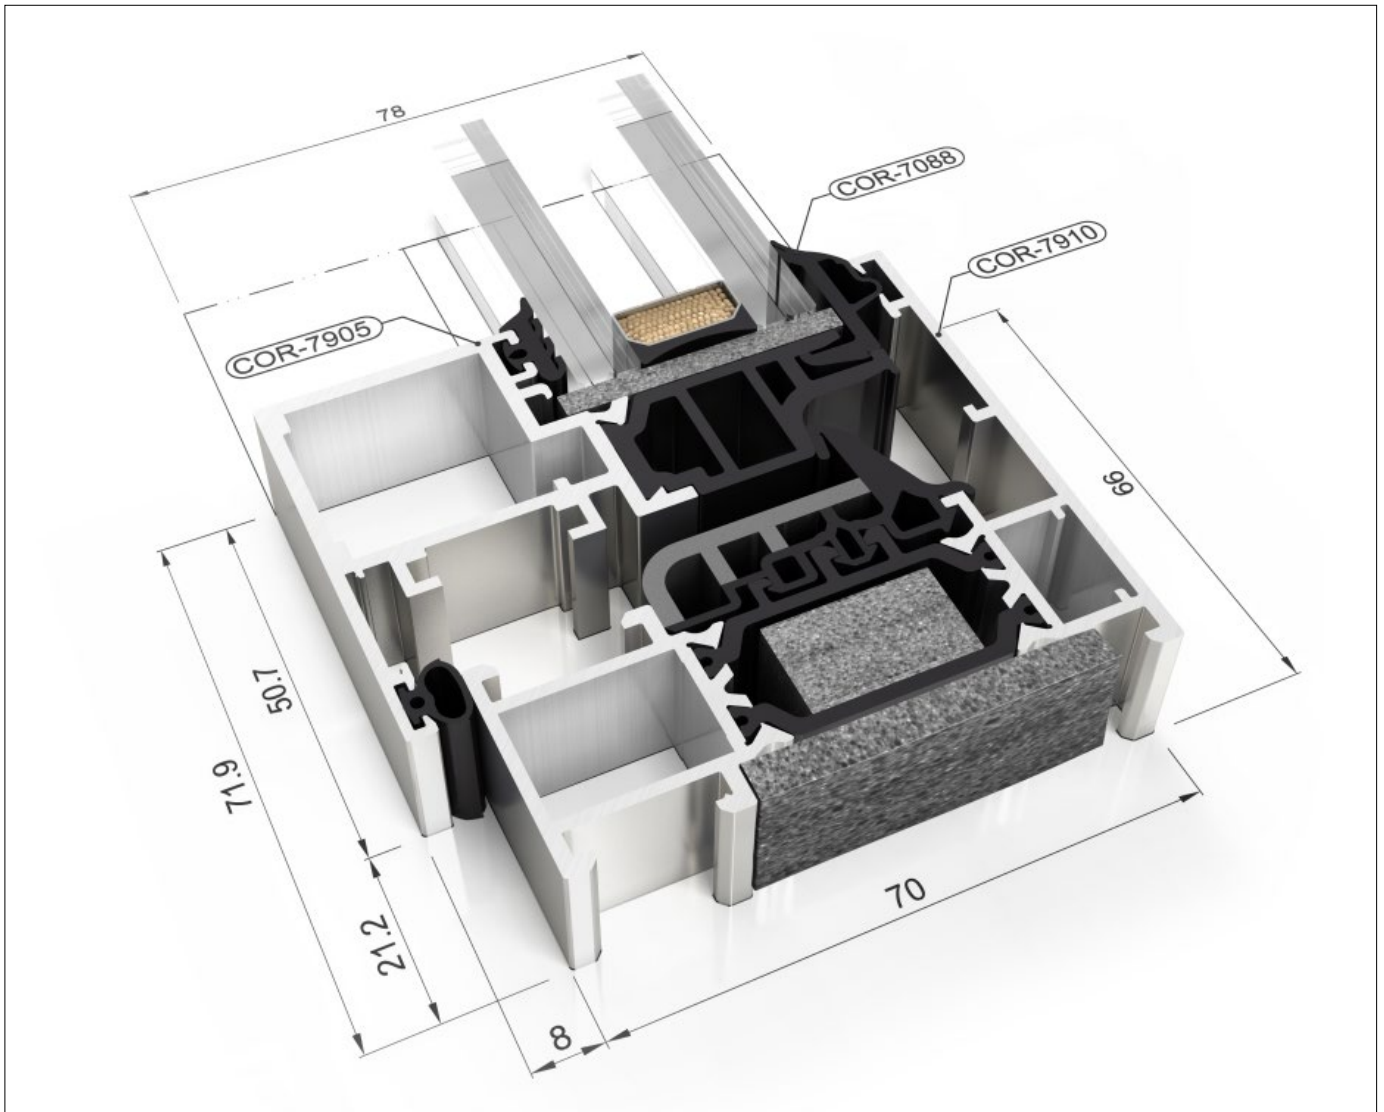

## TEST CENTRE

### » Transmittance

$U_w$  from 1,0 ( $W/m^2K$ )

Please consult typology, dimensions and glazing

### » Maximum acoustic insulation

$R_w=46$  dB

### » Air permeability

(EN 12207:2000) CLASS 4

### » Water tightness

(EN 12208:2000) CLASS E1650

### » Wind resistance

(EN 12210:2000) CLASS C5

Reference test 1,30 x 1,55 m. 1 sash window

Please consult regarding maximum weight and dimensions according to types

» Finishes

Possibility of bicolor systems

Color powder coating (RAL, mottled and rough)

Wood effect powder coating

Anti-bacterial powder coating

Anodized

