

DESCRIPTION

- » A 80 mm frame depth Euro-Groove hidden sash window system
- » Seen surface of only 66 mm from the outside
- » Uw from 0,8 (W/m²K)
- » Extraordinary increase in luminosity
- » Possibility of incorporating hardware with concealed hinges & the security system Evo Security



TECHNICAL DATA

» Maximum glazing thickness
50 mm

» Opening possibilities
Open inwards:
Side hung, turn & tilt & bottom hung .

» Sections
Frame – 80 mm / Sash – 80 mm

» Profile thickness
Window 1,9 mm


» Polyamide strip length
45 mm

» Maximum dimensions/sash
Width (L) = 1.300 mm
Height (H) = 2.400 mm
Standard solution

Width (L) = 1.200 mm
Height (H) = 3.500 mm
Cortizo Hinges HD Side Hung

» Maximum weight/sash
160 Kg



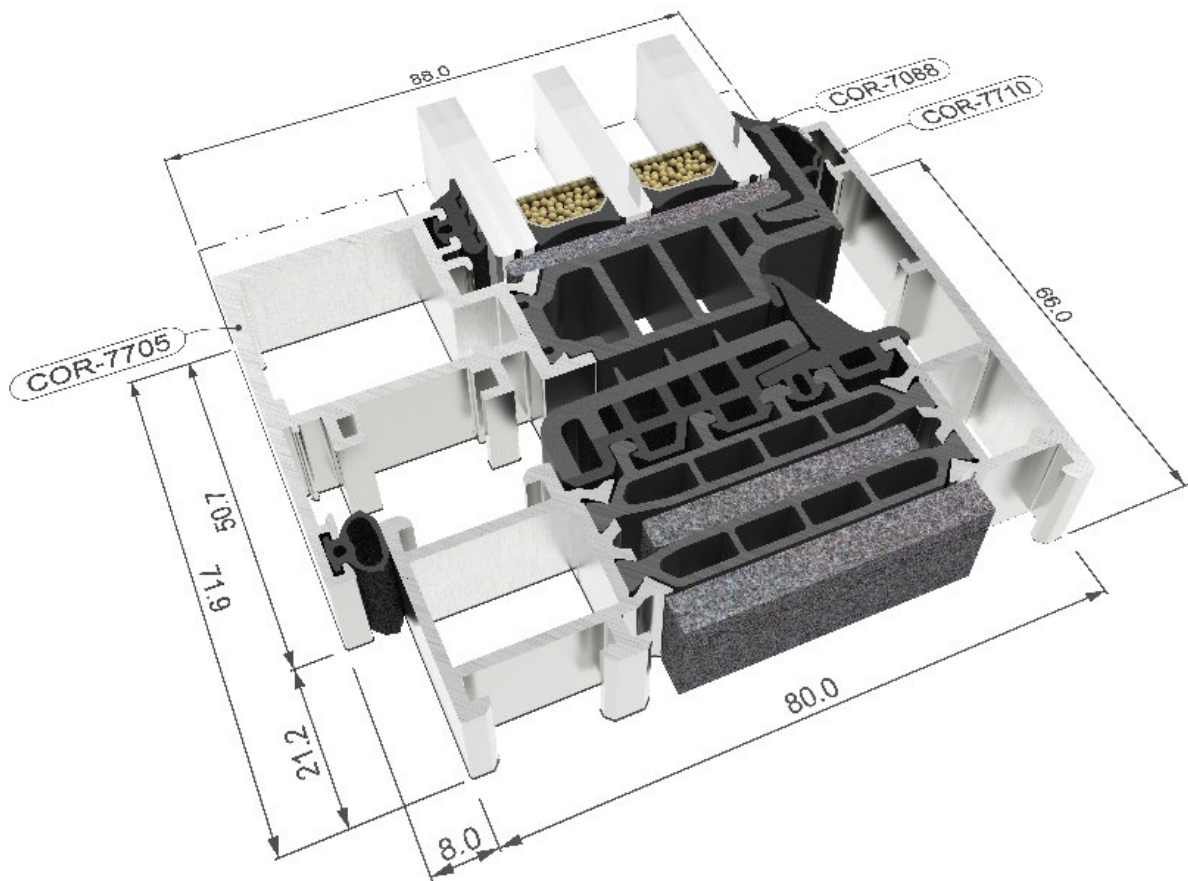

TEST CENTRE

» Transmittance

U_w from 0,8 (W/m²K)

Please consult typology, dimensions and glazing

» Maximum acoustic insulation

$R_w=46$ dB

» Air permeability

(EN 12207:2000) CLASS 4

» Water tightness

(EN 12208:2000) CLASS E1500

» Wind resistance

(EN 12210:2000) CLASS C5

Reference test 1,23 x 1,48 m. 1 sash window

Please consult regarding maximum weight and dimensions according to types.

» Finishes

Possibility of bicolor systems

Color powder coating (RAL, mottled and rough)

Wood effect powder coating

Anti-bacterial powder coating

Anodized

