

DESCRIPTION

- » Hinged window system with frame depth of 80 mm
- » Polyamide strip length 45 mm
- » Transmittance from 0,8 W/m²K
- » Maximum glazing thickness: 65 mm
- » Possibility of setting up concealed hinges & the security system Evo Security



TECHNICAL DATA

» Maximum glazing thickness
65 mm

» Opening possibilities

Open inwards:

Side hung, turn & tilt, tilt & parallel, bottom hung

Open outwards:

Side-hung, top hung projecting

» Sections

Frame – 80 mm / Sash – 88 mm

» Profile thickness

Window 1,5 mm

Door 1,7 mm

» Polyamide strip length

45 mm

» Maximum dimensions/sash


Width (L) = 1.600 mm

Height (H) = 2.600 mm

» Maximum weight/sash

160 Kg



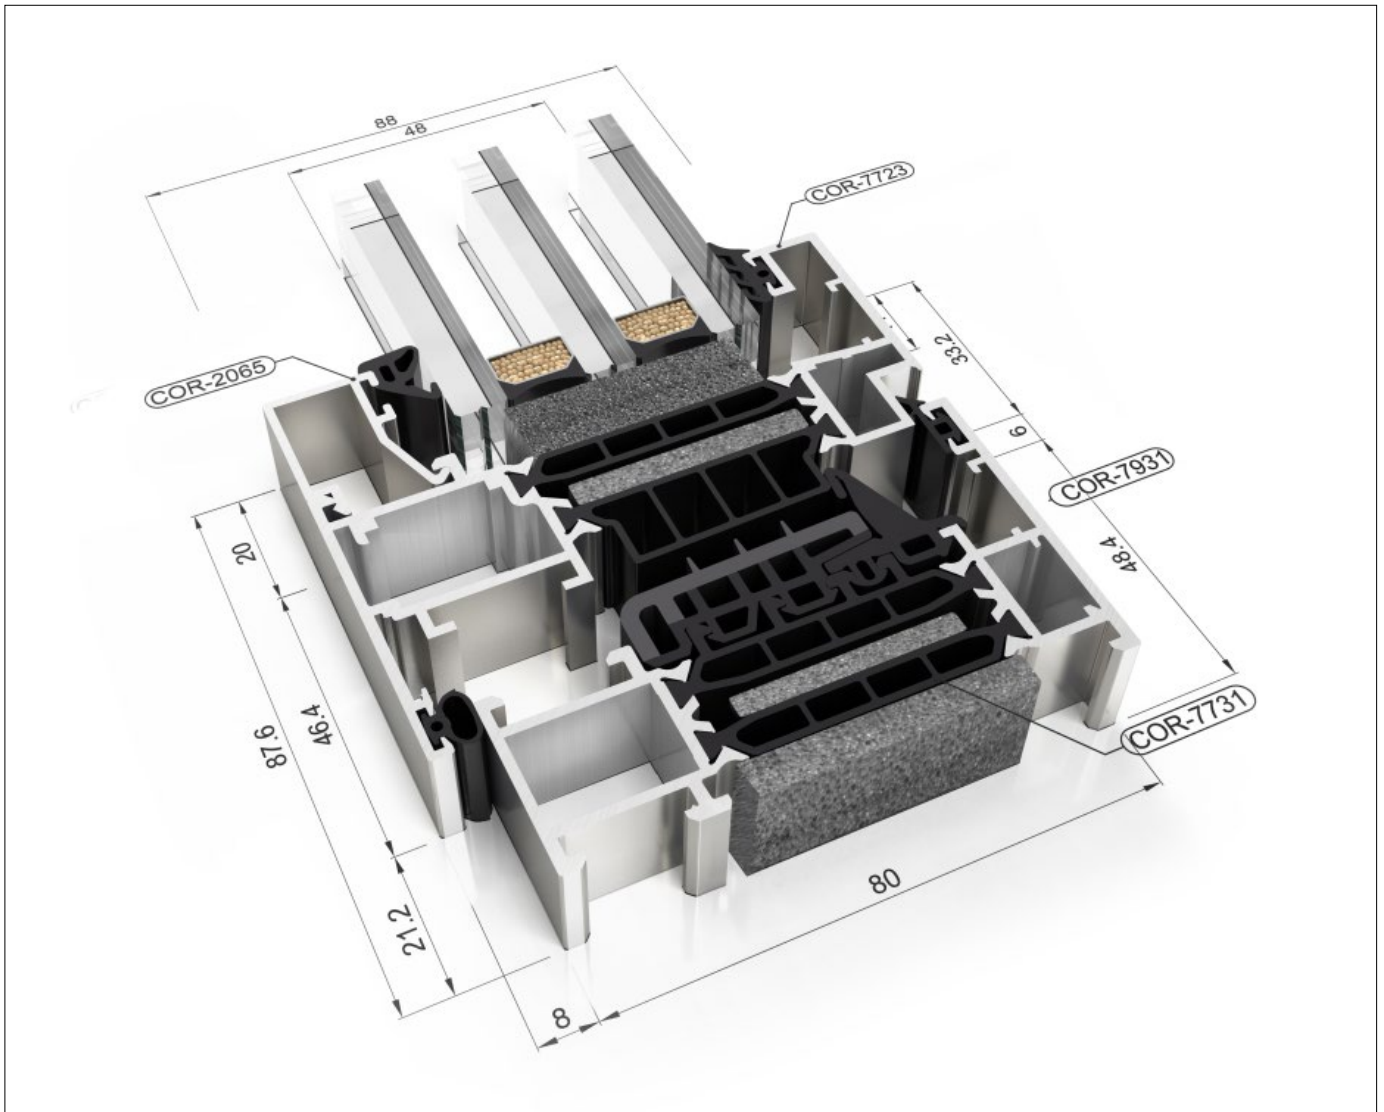

TEST CENTRE

» Transmittance

Uw from 0,8 (W/m²K)

Please consult typology, dimensions and glazing

» Maximum acoustic insulation

Rw=46 dB

» Air permeability

(EN 12207:2000) CLASS 4

» Water tightness

(EN 12208:2000) CLASS E1950

» Wind resistance

(EN 12210:2000) CLASS C5

Reference test 1,23 x 1,48 m.

2 Sashes window.

Please consult regarding maximum weight and dimensions according to types of opening.

» Finished

Possibility of bicolor systems

Color powder coating (RAL, mottled and rough)

Wood effect powder coating

Anti-bacterial powder coating

Anodized

